

F70
Clear PETg – 50 microns
FACESTOCK

Clear rigid PETg for shrink sleeve application. Gloss finish.

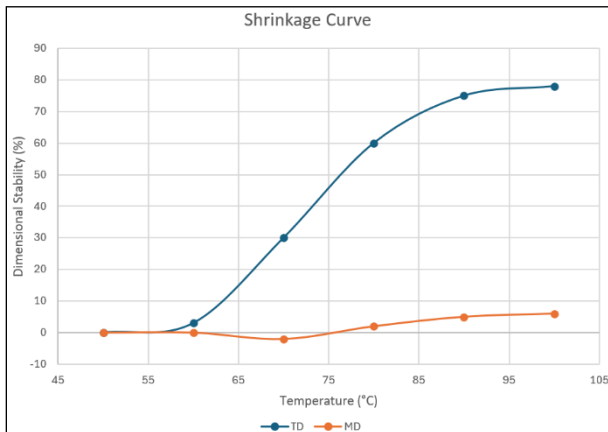
Density: 1.34 g/cm³
 Caliper: 0.020 in / 50 microns

Features:

- Oriented in Transverse direction
- High Shrinkage

Mechanical Data:

Tensile Strength	MD	≥ 40 MPa
	TD	≥ 200 MPa
Elongation	MD	≥ 350 MPa
	TD	≥ 35 MPa
Haze		≤ 8%
Heat Shrinkage (90°C, 10 sec)	MD	≤ 5%
	TD	75-78%

Thermal Data:

APPLICATIONS AND USE

Suitable for Shrink Sleeves.

PRINTING/CONVERTING

This product is suited for standard label printing technologies. Ink testing is recommended before production.

SHELF LIFE – STORAGE

- 6 months when stored at 23±2°C at 50±5% RH.
- Should not be stored in temperature above 29°C (85F)
- Should not be exposed to rapid temperature change
- Should not be stored in direct sunlight
- Ideal storage humidity is 40-70 % RH
- Film should be conditioned a minimum of 24 hours at ambient room temperature before use
- Layflat quality may deteriorate after long storage depending on roll length and storage conditions.

STATEMENT OF PRACTICAL USE

All materials, sales and contracts for sale of LabelEdge products are sold with the express requirement and understanding that the customer is solely and exclusively responsible for testing and for ensuring the products are fit for the customer's purposes or an end-user's purposes. All express or implied warranties of merchantability and fitness for particular use are disclaimed.